

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B65D 30/16, 33/02 // A61J 9/00	A1	(11) International Publication Number: WO 95/11170 (43) International Publication Date: 27 April 1995 (27.04.95)
<p>(21) International Application Number: PCT/AU94/00638</p> <p>(22) International Filing Date: 21 October 1994 (21.10.94)</p> <p>(30) Priority Data: PM 1968 22 October 1993 (22.10.93) AU</p> <p>(71) Applicant (for all designated States except US): TETRA LAVAL HOLDINGS & FINANCE S.A. [AU/AU]; 3 Foray Street, Fairfield, NSW 2165 (AU).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): FLECKNOE-BROWN, Anthony, Earl [AU/AU]; 68 Church Street, Abbotsford, VIC 3067 (AU).</p> <p>(74) Agent: PHILLIPS ORMONDE & FITZPATRICK; 367 Collins Street, Melbourne, VIC 3000 (AU).</p>		<p>(81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: SELF-STANDING FLEXIBLE BAG</p> <p>(57) Abstract</p> <p>A flexible, self-supporting shaped plastics bag has an open end surrounded by a rigid flange, a tubular or frusto-conical side wall depending from the flange to form a generally tubular portion and a base joining the side wall through a radiused portion, the side wall being provided with a plurality of reinforcing ribs extending longitudinally along the tubular portion and through the radiused portion. The thickness of the ribs increases progressively from the open end portion of the container through the radiused portion at which the ribs form elongated knuckles reinforcing the junction of the side wall and base and enabling the container to stand on its base.</p> <div data-bbox="1136 1113 1461 1932"></div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

SELF-STANDING FLEXIBLE BAG

This invention relates to lightweight, flexible plastic bags or pouches and in particular relates to such bags usable as containers for liquid foods or food pastes, and other liquids such as motor oil or household solvents and cleaners.

Much of the recent development in this product area has been in relation to self-standing pouches and disposable infant feeding bottles such as described below. However, a common and important difficulty is in providing such flexible containers which are collapsible to minimise shipping volume and waste volume, yet self-supporting when both empty and full. Another difficulty is with filling such a non-rigid container. Both of these difficulties are addressed in the present invention. The invention also addresses the trend to minimising the use of difficult to recycle materials in such containers, that is by minimising wall thicknesses, whilst retaining adequate functionality. Ideally such containers should be self-supporting for filling, stable during use, yet easily collapsed when emptied by the user.

To illustrate some of the background to this invention, we further consider the "baby bottle" marketed in the U.S.A. by the Playtex company. This consists of an open ended rigid plastic tube together with a screw-top and rubber teat, and is supplied with a number of empty collapsed, flat plastic bags. In use, one such bag is loaded into the open tube and filled with infant formula. The rubber teat and screw-top are then screwed down onto the open end of the plastic bag. The infant can then drink some or all of the contents held within the bag, which collapses as it is emptied. This minimises or eliminates the problem of "air-sucking" during drinking by the infant and provides a more natural, consistent flow of liquid.

When empty, the collapsed bag is then disposed of and no bottle washing is required. Many parents prefer this, as bottle washing with detergent causes concern

- 2 -

about residual chemicals from the detergent dissolving into the formula and being consumed. Nevertheless, the flat empty bags have no flange or flat base and are quite difficult to fit into the holder without leaking. They can be messy to fill and do not lend themselves to refrigeration storage without leaking when pre-filled from a larger batch of formula.

More recently E.I. Du Pont De Nemours & Company in their International Patent Application No. PCT/US90/02367 described an alternative baby bottle construction. The main difference compared with the Playtex bottle was the provision of a semi-rigid, cup-shaped disposable container which replaces the flat plastic bag of the Playtex design. This disposable container is provided with a rigid annular flange at the mouth of the container and thin side walls which are progressively collapsible and which vary in thickness going from very thin near the base to thicker near the flange.

The Du Pont container construction has the advantage that it can be more easily placed in an outer rigid tube because of its rigidity compared with the floppy bag of Playtex. The flanged rim gives a further advantage by providing a stable surface onto which the teat can be sealed. Also, because it retains its shape when filled with product, it is more suitable for marketing in pre-filled form than a non-rigid bag. Furthermore, the rigid flange at the rim is suitable for heat sealing with removable foil or film making the package more user friendly and attractive to consumers.

Whilst the Du Pont container has a number of advantages over simple bags, it has aspects which can cause difficulties. For example, the progressive change in wall thickness can be difficult to control accurately in the container manufacturing process. Furthermore, the region where the thin side walls of the container meet the base may be relatively weak and prone to crumpling. This may be overcome by increasing the thickness of the base, but there is the consequent disadvantage that more plastic material must be used to produce the container.

- 3 -

It is an object of the invention to provide a container consisting of a flexible yet self-supporting bag-like tube which reduces or ameliorates one or more of the aforesaid disadvantages.

5 In one aspect the invention provides a flexible, self-supporting shaped plastics bag having an open end surrounded by a rigid flange, a tubular or frusto-conical side wall depending from the flange to form a generally tubular portion and a base joining the side wall through a
10 radiused portion, the side walls being provided with a plurality of reinforcing ribs extending longitudinally along the tubular portion and through the radiused portion, characterised in that the thickness of said ribs increases progressively from the open end portion of the
15 container through the radiused portion at which the ribs form elongated knuckles reinforcing the junction of the side wall and the base and enabling the container to stand on its base.

The container according to the invention may be used
20 for packaging a range of products including food pastes such as vegetable or fruit puree or potable liquids such as orange juice or milk or other materials such as oil or water, as well as non-food liquid products such as lubricating oils, shampoos and household chemicals.

25 The container may be formed from a mono- or multi-layer sheet of plastics material by a cuspatation dilation method along the lines of that described in Australian Patent No. 534392. If the container is formed generally according to this method, it may be formed with
30 the aforesaid reinforcing ribs running longitudinally along the tubular wall. We have found a way to extend these ribs into the radiused portion joining the wall to the base and this new property forms an important part of our invention, as described hereinafter.

35 The cuspatation dilation method described in Australian Patent No. 534392 involved stretch-forming a hollow article from a heated sheet of thermoplastics material and comprised pressing against one face of the
39 sheet in a primary movement a plurality of tips carried

- 4 -

symmetrically by a tool at a temperature lower than 50°C below the melting point of the sheet and comprising a plunger having an axis extending in the direction of the primary movement, each tip being constituted by an end of a blade which blade is coplanar with the plunger axis and pivoted to the plunger, and, while continuing the primary movement, rotating the blades about their pivots while maintaining each blade coplanar with the plunger axis to symmetrically separate the tips in directions transverse of the plunger and to bring the outer edge of each blade from the tip progressively towards the rear into engagement with the sheet.

When the preferred cuspatation dilation (CD) process is used to produce the present pouch-like containers, the resultant ribs naturally taper in thickness, being almost non-existent at the open end, then progressively thickening to the base and corner knuckle. This is a very desirable property for a deep tube of greater than 2.5 draw ratio, as the accumulated vertical buckling load on the wall increases towards the bottom of a filled, standing pouch.

The thick knuckles which reinforce the base-side wall junction are new, and not seen in earlier CD products. They are formed by changing the CD blade tip geometry away from a relatively sharp tip, that is a tip which chills a localised "blob" of thermoformed melt of plastics material, to a radiused tip, which chills an extended thick knuckle around the side wall corner and into the base at each rib location.

It was previously considered undesirable to use other than a sharp blade tip, as this was thought then to allow "sledding" of the material over the blade end, causing an uncontrolled thinning of the base during draw down of the melt. This was seen to be caused by the relatively strong "cable" of cooler ribbed material chilled by each blade becoming strong enough to pull still molten material around the blade tip from the base. The sharp blade tip was found normally to anchor the melt material and prevent this. However, it is has now been

- 5 -

found possible, for example by the use of more flexible plastics materials, together with the very thin walls required for the present products, for an extended knuckle to be formed without sledging occurring.

5 The material of the container may be a plastics material which is a single or multiple-layer material which may be resistant to oxygen permeation. A multi-layer plastics material comprising a composite of
10 different layers of different plastics with desired properties is particularly suitable. A softer polypropylene, ethylene vinyl alcohol, polypropylene copolymer composite may be suitable in such applications. Other preferred materials leading to good flexibility in
15 the formed products of the present invention include low density polyethylene, linear low density polyethylene, thermoplastic polyurethane and plasticised polyvinyl chloride.

 The container of the invention is also provided with regions of different thickness to allow the container to
20 progressively collapse under pressure differential, for example arising from squeezing the side wall or applying suction to remove the contents, but designed to allow the container to also be free-standing and to maintain its shape (whether or not it is filled with product) in the
25 absence of pressure differential. Preferably the side wall have a film thickness in the range of 30 to 300 micrometers and the ribs have an average thickness in the range of 80 to 600 micrometers and are spaced between 0.5 and 1.5 centimeters apart.

30 Preferably, the longitudinal ribs will be of the order of 1.5 to 4 times the thickness of the tubular wall film of the container. Typically rib thickness will be 150 micrometers to 300 micrometers and the wall film thickness may be substantially constant, and preferably in
35 the range of 50 micrometers to 150 micrometers. The ribs may typically have a width in the range 1mm to 2mm.

 The base of the container may generally have a thickness in the range 50 micrometers to 500 micrometers.

39 The length of the container formed in accordance

- 6 -

with the present invention is preferably greater than 2.5 times the maximum transverse dimension of the open end. Thus for a cylindrical container of 50cm diameter, the length will preferably be at least 125cm.

5 The thickness of the flange will generally be greater than that of the body of the container. Depending on the physical properties of the plastics used, the thickness of the flange will be chosen to ensure a degree of rigidity thereof. In most instances, a thickness in
10 the range of 500 micrometers to 1000 micrometers will be required for the flange.

 Measurement of the suction achievable by a small baby suggests that the container when used as a baby bottle should be capable of collapsing when suction
15 creating a differential container/atmosphere pressure of 1 kPa is applied through the teat.

 Rigidity against bending/buckling during tilting to pour or drink, is also important. This tendency to bend and/or buckle is worst when the tube is partially empty.
20 The weight of the remaining liquid is concentrated in the lower part of the container and this tends, on further tilting, to collapse the already empty part of the tube nearer to the open end, below the hand. The longitudinal ribs in the containers of the present invention thus play
25 an important role in reducing this tendency, hence less material can be used in this tubular pouch. This in turn reduces the amount of rubbish generated from discarded packaging.

 The integral flange, unique for a plastic bag, provides a means of attaching a sealed (for example, heat-sealed film or foil) closure, to maintain a hermetic, bacteria tight package and enabling convenient re-opening. The integral flange also provides a means of reliably clamping the bag into a wide range of dispensers, for
30 example baby bottle holders, without risk of leakage.
35

 This invention is further described with reference to the attached drawings wherein:-

Figure 1 shows a filled container;

39 Figure 2 shows an enlarged sectional view of a circled

- 7 -

section of the container of Figure 1;

Figure 3 shows a container with a seal and dispensing flange;

Figure 4 shows a container of rectangular cross section;

5 Figure 5 shows a plurality of filled containers in an overpackage; and

Figures 1 and 2 illustrate a self-supporting collapsible container and show it in a filled condition containing nutritional, non-carbonated contents (15) and
10 sealed with a foil (6) of metal or plastic which is to be highly resistant to oxygen permeation attached by a peelable, heat, radio-frequency, ultrasonic or friction weld (5) to the relatively thick (say 1mm thick) ring flange (9) to (13) of the hollow container. The container
15 has longitudinally extending ribs 1 formed in the side wall of its tubular portion 3 and extending into radiused portion 2 where the side wall merges with base 4. Ribs 1 are relatively thick compared with the thickness of the side wall between them and form knuckles around the
20 radiused portion 2 which enable the container to stand without independent support, whether filled or unfilled.

Items (9) to (13) are an out-of-scale cross section of the multi-layer material which also makes up the relatively very thin walls and base (typically of say 50
25 to 200 micrometers total thickness) of the container. These layers, bonded together, typically comprise an inner layer (13) of clean, heat resistant, moisture containing thermoplastic polymer, such as polypropylene or polyethylene, two thin adhesive layers (11) on each side
30 of an oxygen barrier layer (12) which is made of a so-called high oxygen barrier thermoplastic polymer such as ethylene vinyl alcohol or polyvinylidene chloride, or other "oxygen barrier" thermoplastics, a scrap layer (10), containing recycled thermoplastic material and an optional
35 outer layer (9) which may be pigmented for colour or opacity to light (as may any or all of the other aforesaid layers).

The container shown in Figure 3 incorporates the
39 ribbing, knuckles and thin film features disclosed in

- 8 -

relation to the containers at Figures 1 and 2. However it is also provided with an optionally thicker walled member 51 shaped in the form of a pouring spout, with a step 52 providing a flange 53. The flange stiffens the container, provides a more rigid means of gripping it in the hand after it is opened and also provides a sealing area for attachment of a sealing film 54 applied over the mouth of the container. The film may be heat sealed to the flange and may incorporate means to facilitate removal such as the pull tab 55.

In Figure 4 a container of square cross section 15 is illustrated to show that the invention is equally applicable to containers having a range of shapes. From this illustration it can be seen that the longitudinal ribs 61 extend into a radiused portion 62 joining the base of the container to the tubular portion 63. The ribs form knuckles at the radiused portion as detailed above in relation to Figures 1 and 2.

Referring to Figure 5, a number of filled and sealed containers 71 according to the invention are shown in a multiple overpack 72. The overpack includes a number of openings top and bottom and designated 73 and 74 respectively to snugly receive the containers 71 in the manner illustrated. The flanges 75 of the containers serve to locate them in the overpack. An outer rigid or semi-rigid cover or stretch film envelope 76 may optionally be provided for additional light blocking or dust protection.

The containers of the invention can be sold empty, as a disposable pouch, such as for disposable baby bottles to be fitted into rigid holders. For this use no oxygen barrier would be needed. If sold as a filled and sealed pack, for chilled storage and distribution, a polymer oxygen barrier layer would also then not be required.

If a polymer layer for oxygen barrier is incorporated into the walls of the tube and if the pack is then sterilised and aseptically filled with suitable heat treated food, or filled first without sterility and then heat or radiation treated as a sealed pack, then a shelf

- 9 -

stable packed product will result, which will not need chilled distribution or refrigerator storage.

If filled with liquid or semi-solid food, it may be desirable to pack with a small inert gas overpressure, typically less than 0.1 atmosphere, in order to provide internal support from both the contents and gas pressure, for handling and transportation of the filled packs. Optionally, overpacking of the type shown in Figure 5, could also be adopted, to help to ensure that the packages reach the end user in good condition.

15

20

25

30

35

39

- 10 -

CLAIMS:

1. A flexible, self-supporting shaped plastics bag having an open end surrounded by a rigid flange, a tubular
5 or frusto-conical side wall depending from the flange to form a generally tubular portion and a base joining the side wall through a radiused portion, the side wall being provided with a plurality of reinforcing ribs extending longitudinally along the tubular portion and through the
10 radiused portion, characterised in that the thickness of said ribs increases progressively from the open end portion of the container through the radiused portion at which the ribs form elongated knuckles reinforcing the junction of the side wall and base and enabling the
15 container to stand on its base.
2. A container as claimed in claim 1, characterised in that the side wall has a wall thickness in the range of 30 to 300 micrometers and the ribs have a thickness in the
20 range of 80 to 600 micrometers and are spaced between 0.5 and 1.5cm apart.
3. A container as claimed in claim 1 or claim 2, characterised in that the ribs have a thickness 1.5 to 4
25 times the thickness of the side wall.
4. A container as claimed in any preceding claim, characterised in that the side wall has a wall thickness in the range of 50 to 150 micrometers and the ribs have a
30 thickness in the range of 150 to 300 micrometers.
5. A container as claimed in any preceding claim, characterised in that the length of the container is greater than 2.5 times the maximum transverse dimension of
35 the open end.
6. A container as claimed in any preceding claim, characterised in that the base has a thickness in the
39 range of 50 to 500 micrometers.

- 11 -

7. A container as claimed in any preceding claim, characterised in that the ribs have a width in the range of 1 to 2 millimeters.

5 8. A container as claimed in any preceding claim, characterised in that the flange has a thickness in the range of 500 to 1000 micrometers.

10 9. A container as claimed in any preceding claim characterised in that the container is progressively collapsible under a differential pressure between the interior and exterior of the container of 1 kPa.

15


20

25

30

35

39

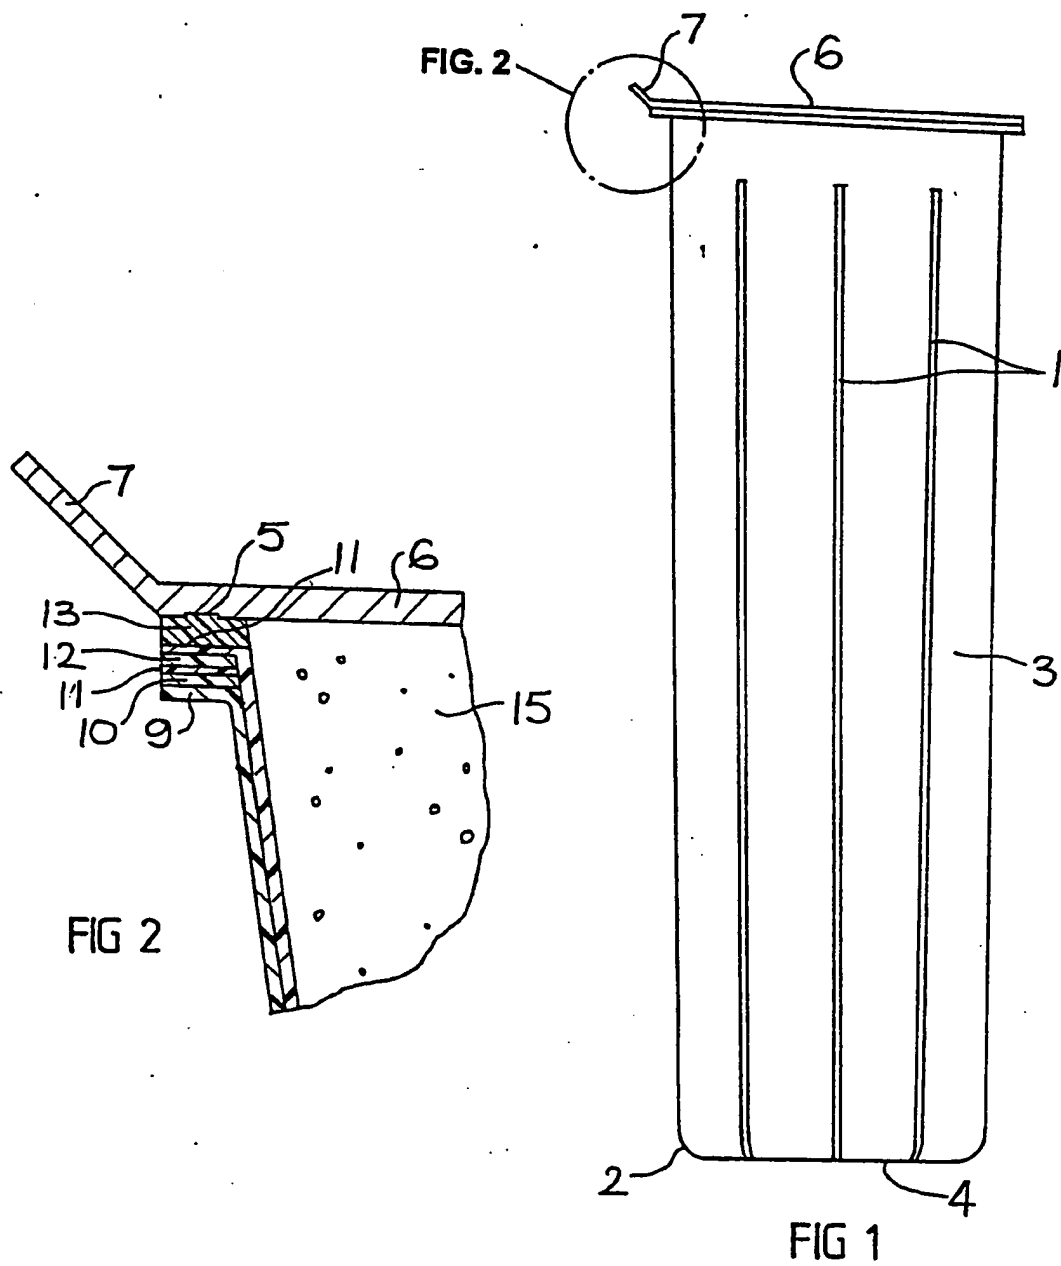

2/3

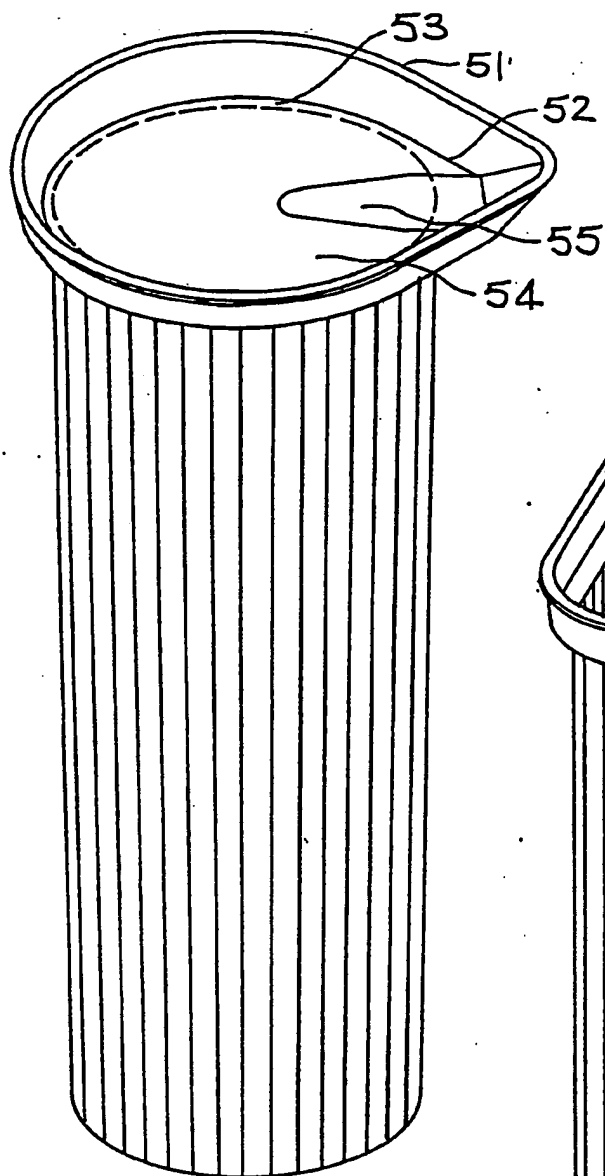


FIG 3


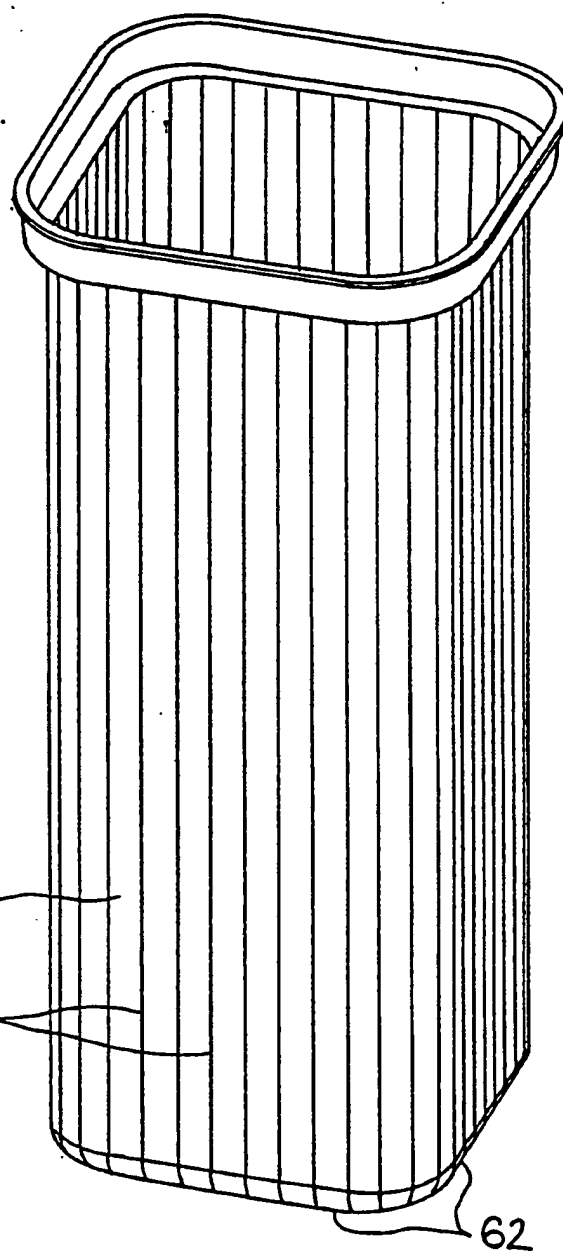


FIG 4


3/3

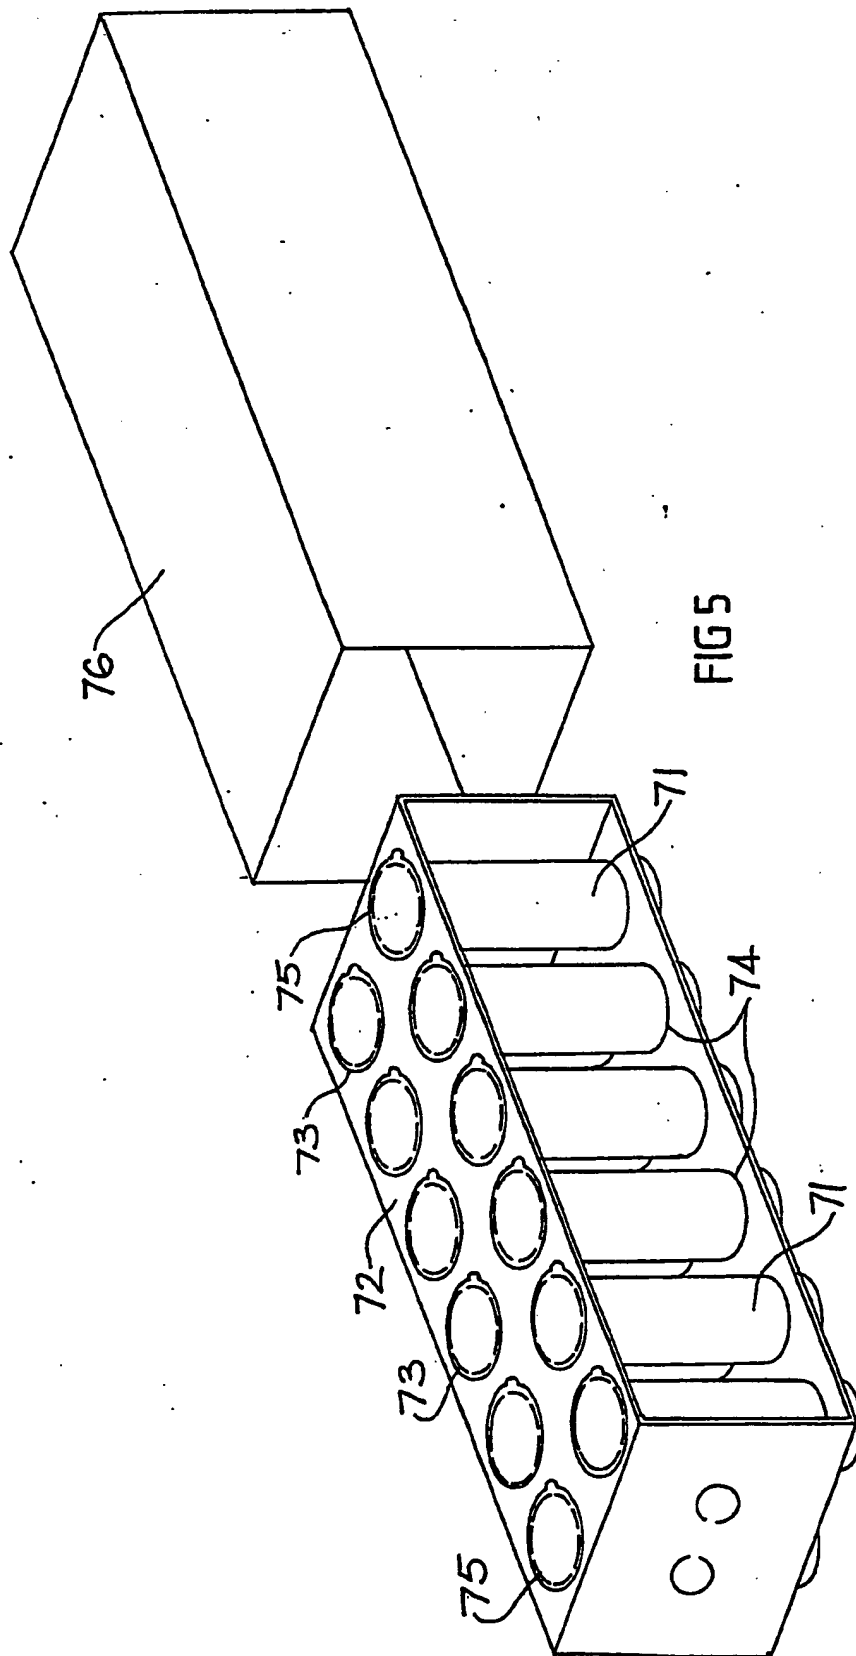

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 94/00638

A. CLASSIFICATION OF SUBJECT MATTER Int. Cl. ⁶ B65D 30/16, 33/02 // A61J 9/00 According to International Patent Classification (IPC) or to both national classification and IPC					
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC: B65D 1/26, 1/32, 1/42, 30/10, 30/16, 33/02 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU: IPC as above and B65D 25/16; A61J 9/00 Electronic data base consulted during the international search (name of data base, and where practicable, search terms used)					
C. DOCUMENTS CONSIDERED TO BE RELEVANT					
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.			
P, X Y	AU, A, 42945/93 (ACI OPERATIONS PTY LTD) 9 December 1993 (09.12.93) Figure 2 Ribs of increasing thickness (radial direction)	1-9 1-9			
X Y	AU, B, 47160/79 (534392) (AARC (MANAGEMENT) PTY LIMITED et al.) 1 May 1980 (01.05.80) Figure 1 Page 4d Ribs of increasing thickness (radial direction)	1-9 1-9			
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex. </div>					
<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance earlier document but published on or after the international filing date</p> <p>"E" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="width: 33%; vertical-align: top;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </td> <td style="width: 33%;"></td> </tr> </table>			<p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance earlier document but published on or after the international filing date</p> <p>"E" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>	
<p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance earlier document but published on or after the international filing date</p> <p>"E" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>				
Date of the actual completion of the international search 4 January 1995 (04.01.95)		Date of mailing of the international search report 10 Jan 1995 (10.1.95)			
Name and mailing address of the ISA/AU AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No. 06 2853929		Authorized officer <div style="text-align: center; font-size: 1.2em;">  </div> R.J. KIRBY Telephone No. (06) 2832569			

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 94/00638

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate of the relevant passages	Relevant to Claim No.
X	AU,B, 32558/50 (147608) (THE METAL BOX COMPANY) 20 April 1950 (20.04.50) Figures 1, 2, 5. Ribs (beads) 10	1
Y	AU,A, 81441/82 (AARC (MANAGEMENT) PTY LIMITED) 2 September 1982 (02.09.82) Figure 1	1-9
A	AU,B, 30878/63 (265114) (ILLINOIS TOOL WORKS INC) 26 November 1964 (26.11.64) Figures 11, 12, 13	
A	Patent Abstracts of Japan, M1410 Page 154, JP,A, 4-367434 (MAMORU KAMO) 18 December 1992 (18.12.92) Abstract	

INTERNATIONAL SEARCH
Information on patent family members.

PCT/AU 94/00638

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
AU	42945/93	WO	9324391
AU	47160/79	AT	10457
		DK	2053/79
		HK	493/88
		NO	160912
		US	4288401
		JP	3075337
		EP	72832
		PT	74483
		ZA	8201179
		CA	1135020
		DK	159910
		IE	49576
		NZ	190442
		US	4480979
		AU	81441/82
		GR	76068
		WO	8202850
		IT	1235456
		DE	2967310
		EP	6682
		NO	791654
		SG	1019/87
		JP	55007486
		BE	892233
		IL	65231
		IT	8219802
		IT	8219802
AU	81441/82	US	4480979
		GR	76068
		PT	74483
		AT	10457
		DE	2967310
		BE	892233
		IL	65231
		WO	8202850
		AU	534392
		EP	72832
		IT	8219802
		ZA	8201179
		CA	1135020
JP	4367434		

END OF ANNEX